




IZOLATOR COMPOZIT TIP SUPORT (TIP ISNS)

Maira P 24.07.293

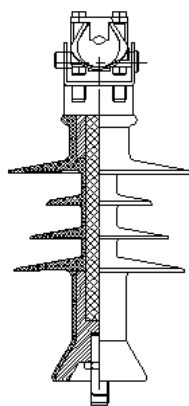

CONDITII DE MEDIU

Temperatura maxima	+ 50 °C
Temperatura minima	- 55 °C
Umiditatea relativa maxima	100 %
Altitudinea maxima	2500 m
Nivel radiatii solare	Puternic
Pozitionare in instalatii	Exterior

CARACTERISTICI TEHNICE

Tensiunea nominala	20 kV
Tensiunea maxima	24 kV
Frecventa nominala	50 Hz/60 Hz
Tensiune de tinere la frecventa ind. in mediu uscat timp de 1 min	90 kV
Tensiune de tinere la frecventa ind. in mediu umed timp de 1 min.	70 kV
Tensiune de tinere la impuls de trasnet (pozitiva) -50%	189 kV
Tensiune de tinere la impuls de trasnet (negativa) -50%	240 kV
Tensiune de tinere la impuls de trasne	181,4 kV
Stratul galvanizat pe partea metalica	70 µm Zn
Armaturi metalice superioare din otel	Sferic
Tipul materialului	Cauciuc siliconic
Sarcina mecanica specifica	1575 lbs/7 kN
Linia de fuga	21 inch/532 mm
Sarcina maxima admisibila	1910 lbs/11,5 kN
Lungime	11,5 inch/293 mm
Greutate	4,2 lbs/1,9 kg
Nivel de poluare	II (2,1 cm/kV)

Maira Montaj SRL

Str. Stirbei Voda, Nr. 166, Bl. C 20, Et. 1, Ap. 3, Sect. 1, Bucuresti, RC J 40/3784/1997; RO 6661834 ; RO87INGB5568999900592490

P.L. : Bucuresti, Str. Inovatorilor,Nr.38A ; Craiova , Parc Industrial -Est , Strada Aviatorilor , nr 10A

Atestat: ANRE nr. 10994/11.05.2015; CNCAN -cls.4 nr. 17-015/21.07.2017; CNCAN-cls.4, nr.17-016/21.07.2017; ISCIR nr. B/CR4/K,L/14/1787/1/21.02.2014;

Certificat : SR EN ISO 9001/2015 SRAC Nr.: RO-7660 ; SR EN ISO 14001/2015,SRAC Nr.:RO-2954

Tel.: (+4) 0214137690, (+4) 0214137691; Fax : (+4) 0216372123, (+4) 0214139159; email : office@maira.ro, comercial@maira.ro

http: www.maira.ro, www.mairaelectric.co.uk