


## LANT DUBLU DE INTINDERE CU IZOLATOARE COMPOZITE

### Maira LDI 000

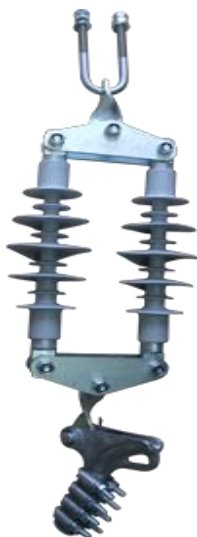

Nr.crt	Tip izolator
1	H 24.80.445 (IV,TT)
2	L 24.80.361 (II,TT)

#### ELEMENTELE ANSAMBLULUI:

Izolatoare compozite tip tija	2
Jug simplu	2
Piesa rasucita	2
Piesa U 60 sau B 6,5	1
Clema amagnetica de intindere	1

#### CONDITII DE MEDIU:

Temperatura maxima	+ 55°C
Temperatura minima	- 55°C
Umiditatea relativa maxima	100 %
Categoria climatica	N – SR HD 478.2.1.S1
Categoria de exploatare	3 – SR 1054-93

#### CARACTERISTICI TEHNICE:

Tensiunea nominala	24 kV
Tensiunea de tinere la frecventa industriala sub ploaie	85 kV
Tensiunea de conturnare (medie a 5 conturnari)	119,4 kV
Tensiunea de tinere la impuls de trasnet (polaritate negativa)	243 kV
Tensiunea de tinere la impuls de trasnet (polaritate pozitiva)	215,4 kV
Sarcina maxima specificata	80 kN

#### Maira Montaj SRL

Str. Stirbei Voda, Nr. 166, Bl. C 20, Et. 1, Ap. 3, Sect. 1, Bucuresti, RC J 40/3784/1997; RO 6661834 ; RO87INGB5568999900592490

P.L. : Bucuresti, Str. Inovatorilor,Nr.38A ; Craiova , Parc Industrial -Est , Strada Aviatorilor , nr 10A

Atestat: ANRE nr. 10994/11.05.2015; CNCAN -cls.4 nr. 17-015/21.07.2017; CNCAN-cls.4, nr.17-016/21.07.2017; ISCIR nr.

B/CR4/K,L/14/1787/1/21.02.2014; Certificat : SR EN ISO 9001/2015 SRAC Nr.: RO-7660 ; SR EN ISO 14001/2015,SRAC Nr.:RO-2954

Tel.: (+4) 0214137690, (+4) 0214137691; Fax : (+4) 0216372123, (+4) 0214139159; email : office@maira.ro, comercial@maira.ro

http: www.maira.ro, www.mairaelectric.co.uk